

SCALABLE PERFORMANCE TO MEET ANY BUSINESS CHALLENGE



imageFORCE C3150 is built for scalability and versatility, making it the ideal solution for businesses that manage a wide range of document types and volumes.

From high-speed scanning to efficient handling of compact documents like business cards, customers can select the right configuration to simplify digitization and keep workflows efficient.

D² Exposure technology ensures that the imageFORCE C3150 delivers high-resolution images of up to 4,800 x 2,400dpi. With a flexible paper capacity ranging from 1,200 to 6,350 sheets, it supports diverse requirements, ensuring efficient and uninterrupted operations.



CONNECTIVITY

Get the option to access cloud platforms like Google Drive and Dropbox directly from the device. Enjoy mobile printing with Canon PRINT, Apple AirPrint and more for ultimate convenience.



SECURITY

Advanced protection for your data, with features like user authentication and audit logs that help you monitor and mitigate potential risks.



RELIABILITY

Engineered for optimal performance, with intelligent maintenance tools and long-lasting parts that reduce downtime and maximise uptime.



SUSTAINABILITY

Built with up to 30% recycled plastic, supported by eco-friendly packaging and lower energy consumption.

imageFORCE C3150 Specifications

Main Unit

Machine type

A3 Colour Multifunctional

Core functions

Print, Copy, Scan, Send, Store and Optional Fax

Processor

Dual Core Processor

Control Panel

10.1" TFT LCD WSVGA Colour Touch panel

Memory

Standard: RAM: 5.0GB

Storage

Standard: (SSD) 256GB

Optional: (SSD) 1TB

Interface Connection

Network

Standard: 1000Base-T/100Base-TX/10Base-T

Optional: Wireless LAN (IEEE

802.11a/b/g/n/ac/ax)

Others

Standard: USB 2.0 (Host) x 1, USB 3.0 (Host) x 1,

USB 2.0 (Device) x 1

Optional: Serial Interface, Copy Control Interface

Paper Supply Capacity (A4, 80gsm)

Standard: 1,200 sheets

100-sheet Multi-purpose tray x 1

550-sheet Paper cassette x 2

Maximum: 6,350 sheets (with High Capacity

Cassette Feeding Unit-G1 + Paper Deck Unit-F3)

Paper output capacity (A4, 80gsm)

Standard: 250 sheets

Maximum: 3,450 Sheets (with Staple Finisher-AH1 or

Booklet Finisher-AH1 and Copy Tray-T2)

Supported Media Types

Multi-purpose tray:

Thin, Plain, Recycled, Colour, Heavy, Coated*,

Tracing, Bond, Transparency, Label, Pre-punched,

Letterhead, Envelope

* 257~300gsm requires Media Adjustment Kit

Upper Cassette:

Thin, Plain, Recycled, Colour, Heavy, Bond,

Transparency, Pre-punched, Letterhead, Envelope

Lower Cassette:

Thin, Plain, Recycled, Colour, Heavy, Bond,

Transparency, Pre-punched, Letterhead, Envelope

Supported Media Sizes

Multi-purpose tray:

Standard size:

SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R

Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm

Free Size: 100.0 x 148.0 mm to 304.8 x 457.2 mm

Envelopes: COM10 No.10, Monarch, DL, ISO-C5

Envelope custom size: 98.0 x 98.0 mm to 320.0 x

457.2 mm

Upper Cassette:

Standard size: A4, A5, A5R, A6R, B5

Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm

Envelopes: ISO-C5

Lower Cassette:

Standard size:

A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R

Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm

Envelopes: COM10 No.10, Monarch, DL

Supported media weights

Multi-purpose tray: 52 to 300 gsm (257 gsm to 300

gsm supported with Media Adjustment Kit)

Upper/Lower Cassette: 52 to 256 gsm

Duplex: 52 to 220 gsm

Warm-up Time

Quick Startup Mode: 4 Seconds or less*

* Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.

From Power On: 10 seconds or less*

* Time from device power-on, until copy ready (not print reservation)

From Sleep Mode: 10 Seconds or less

Dimensions (W x D x H)

With Platen Cover-Y3: 565 x 745 x 788 mm

With Single Pass DADF-E1: 565 x 745 x 897 mm

With Single Pass DADF-F1: 565 x 745 x 862 mm

Installation Space(W x D)

Basic:

978 x 1,141 mm (with Single Pass DADF-E1 + right door & multi-purpose tray opened + paper cassette opened)

978 x 1,141 mm (with Single Pass DADF-F1 + right door & multi-purpose tray opened + paper cassette opened)

Fully Configured:

1,651 x 1,141 mm (with Single Pass DADF-E1 + Staple

Finisher-AH1/Booklet Finisher-AH1 + Copy Tray-T2

extended + paper cassette open)

1,651 x 1,141 mm (with Single Pass DADF-F1 + Staple

Finisher-AH1/Booklet Finisher-AH1 + Copy Tray-T2

extended + paper cassette open)

Weight*

*including regular toner

With Platen Cover-Y3: Approx. 79 kg

With Single Pass DADF-E1: Approx. 92 kg

With Single Pass DADF-F1: Approx. 85 kg

Print Specifications

Print Speed (BW and CL)

1-sided: Up to 50 ppm (A4, A5R), Up to 25 ppm

(A3), Up to 45 ppm (A5, A6R), Up to 30 ppm (A4R)

Print Resolution (dpi)

4,800 x 2,400

Page description languages

Standard: PCL6/PCL5 UFR II

Optional: Adobe PostScript 3

Direct Print

Supported file types: PDF, EPS, TIFF/JPEG, and XPS

Printing from mobile and cloud

AirPrint, Mopria® Print Service, IPP Everywhere,

Canon PRINT, uniFLOW Online, Universal Print and

Cloud Connector

OS Standard Printing

Android/Windows® 11/Chrome OS/macOS (11.2.2

or later) /iOS (15.2 or later)/iPadOS

Fonts

PS fonts: 136 Roman

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,

Andalé Mono WT J/K/S/T*¹ (Japanese, Korean,

Simplified and Traditional Chinese), Barcode

fonts*²

*¹ Optional PCL International Font Set-A1 is required.

*² Optional Barcode Printing Kit-D1 is required.

Operating System:

UFR II:

Windows®11/Server2016/Server2019/Server2022/

Server2025, macOS (10.14 or later)

PCL:

Windows®11/Server2016/Server2019/Server2022/

Server2025

PS:

Windows®11/Server2016/Server2019/Server2022/

Server2025, macOS (10.14 or later)

PPD: Windows® 11, macOS (10.15 or later)

As of Nov. 2025

Copy Specifications

Copy Speed (BW and CL)

1-sided: Up to 50 ppm (A4, A5R), Up to 25 ppm

(A3), Up to 45 ppm (A5, A6R), Up to 30 ppm (A4R)

First-Copy-Out Time (A4, BW/CL)

Approx. 4.2 / 5.5 seconds or less

Copy resolution (dpi)

600 x 600

Multiple Copies

Up to 999 copies

Copy Density

Automatic or Manual (9 Levels)

Magnification

Variable zoom: 25% to 400% (1% Increments)

Scan Specifications

Type

Standard: Colour Platen
Optional: Platen Cover-Y3, Single Pass DADF-E1* or Single Pass DADF-F1* [2-sided to 2-sided (Automatic with DADF)]
** Multi-Sheet Feed Detection is supported.*

DADF: Duplexing Automatic Document Feeder

Document Feeder Paper Capacity (80 gsm)

Single Pass DADF-E1: up to 200 Sheets
Single Pass DADF-F1: up to 100 Sheets

Document Feeder acceptable paper weight

Document Feeder media weight:
Single Pass DADF-E1:
1-sided scanning: 38 to 220 gsm (BW, CL)
2-sided scanning: 38 to 220 gsm (BW, CL)
**An acceptable weights of A6R or smaller is 50 to 220gsm.*

Single Pass DADF-F1:

1-sided scanning: 38 to 128 gsm (BW, CL)
2-sided scanning: 50 to 128 gsm (BW, CL)

Supported media sizes

Platen scanning size: up to 297.0 x 431.8 mm
Single Pass DADF-E1:
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R
Custom size: 69.9 x 139.7 mm to 304.8 x 431.8 mm
Single Pass DADF-F1:
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R
Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm

Scan Speed (ipm: A4)

Single Pass DADF-E1:
1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy)
2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy)

Single Pass DADF-F1:

1-sided Scanning: 80/80 (300 x 300 dpi, send), 60/60 (600 x 600 dpi, copy)
2-sided Scanning: 120/120 (300 x 300 dpi, send), 60/60 (600 x 600 dpi, copy)

Scan Resolution (dpi)

600x600

Pull Scan Specifications

Colour Network ScanGear2 for both TWAIN and WIA
Supported OS: Windows® 11/Server 2016/Server 2019/Server 2022/Server 2025

Send Specifications

Destination

Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, WebDAV, Mail Box
Optional: Super G3 FAX, IP Fax
** Supported OAuth 2.0 authorization flows in Microsoft 365 and Google Workspace.*

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Communication protocol

File: FTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV
E-mail/I-Fax: SMTP, POP3

File Format

TIFF (MMR), JPEG, PDF (Compact, Searchable, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)

Fax Specifications

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 kbps
G3: 14.4 kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)

Sending/Receiving Size

Sending: A3, A4, A4R, A5*1, A5R*1, A6R*1, B4, B5*2, B5R*1
Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R
**1 Sent as A4
2 Sent as B4 short

FAX memory

Up to 30,000 pages (2,000 jobs)

Speed dials

Max. 200

Group dials/destinations

Max. 199 dials

Sequential broadcast

Max. 256 addresses

Memory backup

Yes

Store Specifications

Mail Box (Number supported)

100 User Inboxes,
1 Memory RX Inbox,
50 Confidential Fax Inboxes
Maximum 10,000 Pages (2,000 jobs) Stored

Advanced Box

Communication Protocol: SMB or WebDAV
Supported Client PC: Windows® 11
Concurrent Connections (Max.): SMB:64,
WebDAV:3

Advanced Box available disc space

Standard:16 GB
(With option: max. 480 GB)

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (Relative Humidity)

Power source

220-240 V, 50/60 Hz, 10 A

Power consumption

Maximum: Approx. 1,800 W
Sleep mode: Approx. 0.5 W*
** 0.5 W is not available in all circumstances due to certain settings.*

Consumables


Toner Cartridges

NPG-1007 Toner BK/C/M/Y
NPG-1007L Toner C/M/Y

Toner Yield (Estimated @ 5.0% Coverage)

NPG-1007 BK: 36,000 pages
NPG-1007 C/M/Y: 19,000 pages
NPG-1007L C/M/Y: 2,500 pages

Configuration Output Options*

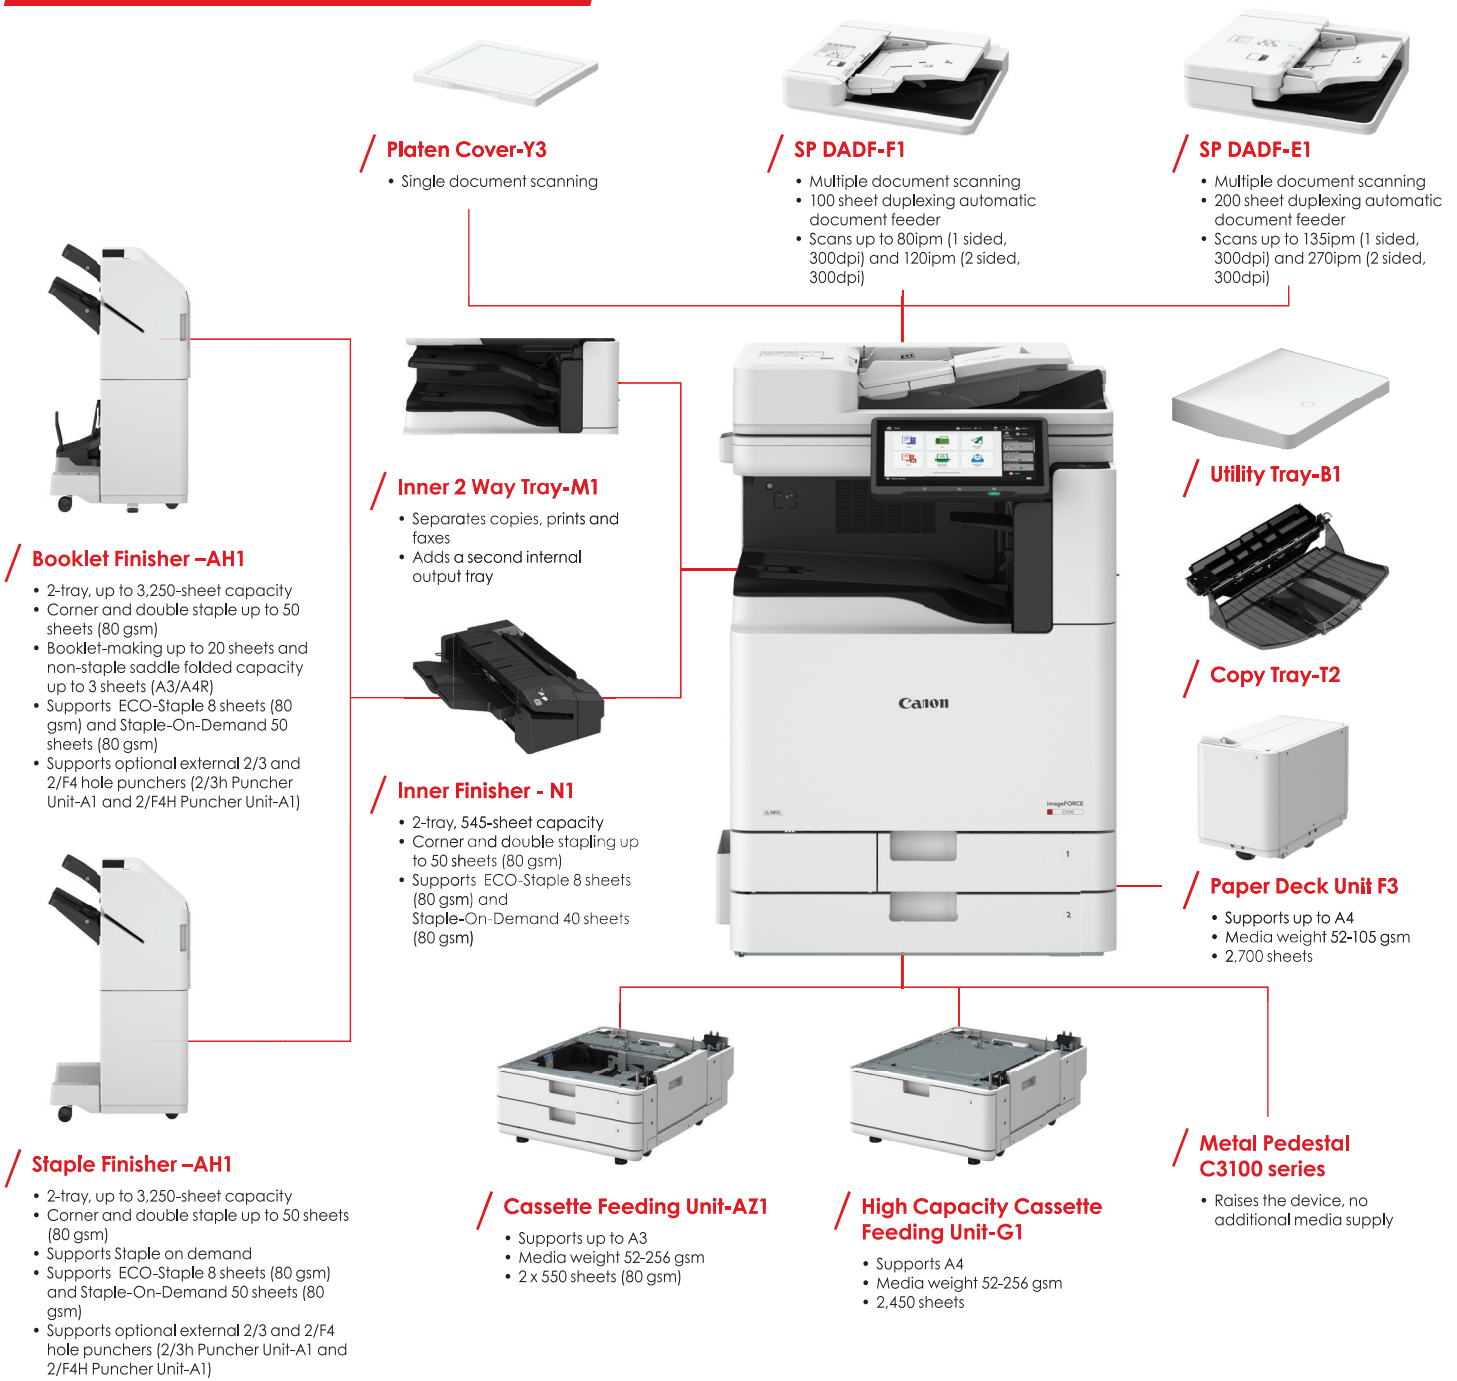

*Paper capacity may vary with different paper type/size.



Partner / Dealer Stamp

To arrange for a demonstration, simply contact our office below.

**SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS**

Canon Singapore Pte. Ltd. | 1 Fusionopolis Place #14-10 Galaxis Singapore 138522
Tel: 65-6799 8888 | Fax: 65-6799-8882 | <https://asia.canon/> | <https://sg.canon/>

This document is for general information only and contents are subject to change without notice. Errors and omissions excepted. Weights and dimensions are approximate. Options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations in connection with this document. Trademarks belong to their respective owners.

Canon, imageFORCE, eMaintenance, iW and Business Can Be Simple are trademarks of Canon Inc. and/or its affiliates. "MEAP" is a trademark of CANON Inc., referring to an "application platform" for Canon multifunction and single function printers. Other names may be the trademarks of their respective owners. uniFLOW is an independent party software distributed by Canon Singapore Pte Ltd.

Adobe, LiveCycle, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries.

©2025 Canon Singapore Pte. Ltd.
All rights reserved. Printed in Singapore.