

imagePROGRAF
TM-5510 | TM-5515

Canon
Delighting You Always

Reliable Productivity for Every Print


24"



TM-5510



TM-5515



Bring every idea to life with vibrant colour, sharp detail, and exceptional image quality. From impactful marketing visuals or precise technical drawings, the **imagePROGRAF TM-5515** and **TM-5510** delivers with performance and reliability businesses need to create with confidence.

Reliable Productivity for Every Print

Designed for businesses that demand more, the latest **24" imagePROGRAF TM-5510 and TM-5515** promise outstanding image quality, vibrant colour and precise detail with dependable performance. From technical drawings to eye-catching marketing materials, deliver every print with confidence.

TM-5515



The image processor enhances colour and contrast, enabling the production of vivid posters on inexpensive plain paper.

Print True Borderless

Print stunning borderless posters on any roll paper size, with no trimming or post-processing required.

Performance You Can Depend On

Keep productivity high without sacrificing speed nor quality. Engineered for reliable performance under heavy workloads, the printers produce sharp lines and text, thanks to new high-density **Matte Black Ink**.



Matte Black Ink
(PFI-8123 MBK)



TM-5510

Streamline for Productivity

Streamline how you manage workflows with convenient and intuitive software applications.

DIRECT PRINT PLUS

The Direct Print Plus feature allows you to print of **HP-GL2, TIFF, JPEG and PDF files** in batches with custom templates with minimal effort.



FREE LAYOUT PLUS

Documents can be resized easily with Free Layout Plus, which allows files to be dragged and dropped into the software for **easy document resizing to specific paper layouts**.

ACCOUNTING MANAGER

Monitor and **keep track of print usage** with ease using the Accounting Manager application.

POSTER ARTIST

Design vibrant posters for your needs with minimal effort using the PosterArtist application.

Check it out at posterartist.canon.



Secure Every Print Workflow

Protect confidential documents and critical business data with robust security features that guard against unauthorised access, data alteration and information leakage. A full suite of device, network and document security help keep your printing environment secure.

Designed for Efficient Workspaces


Designed for compact workspaces, the printers combine a small footprint with a flat top design, making roll paper replacement and temporary placement of output prints more convenient.



Complete front-access operation further simplifies paper loading, ink replacement and output retrieval, while a new desktop basket helps keep prints neatly organised in desktop environments.

*For 24" model only.

Ability to view the status of the printer and consumables at one glance with the **4.3" touch screen panel**.

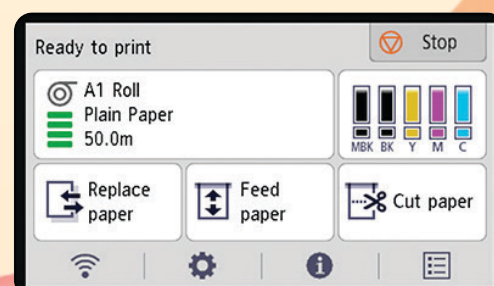

Specifications

MODEL			TM-5510 (24")		TM-5515 (24")	
Ink Type			Pigment inks / 5 colour (MBK / BK / C / M / Y)			
Max. Print Resolution			2,400 x 1,200 dpi			
Unit Dimensions (W x D x H)	Main Unit		978 x 720 x 421 mm Weight: 42 kg (including Roll Holder Set, excluding ink and print head)			
	Main Unit + Stand + Loading Basket ¹		978 x 885 x 1041 mm (Basket Opened) 978 x 756 x 1041 mm (Basket Closed) Weight: 55 kg			
Package Dimensions (W x D x H)	Printer (Main unit with pallet)		1152 x 913 x 650 mm Weight :74kg			
	Stand + Loading Basket		1058 x 826 x 270 mm Weight : 22kg			
	DesktopBasket (BU-07)		798 x 301 x 111 mm Weight : 2kg			
	Printer (Main unit with Stand + Loading Basket and pallet)		1152 x 913 x 914 mm Weight : 97kg			
Power Supply	Input Power		AC 100-240V (50-60Hz)			
	Power Consumption ²		Approx. 62 W		Approx. 64 W	
	Sleep Mode ²		Approx. 1.6 W			
	Power Off		Approx. 0.06 W			
Recommended Environment			Temperature: 15 ~ 30°C Humidity: 10 ~ 80% RH (no dew condensation)			
Acoustic Noise	Acoustic Pressure	Operation	Approx. 41 dB			
		Standby	35dB(A) or less ³			
	Acoustic Power	Operation	Approx. 6.2 Bels ³			
Line Accuracy ⁴			±0.1%			
Standard Memory			2 GB	128 GB (Physical memory 2 GB)		
Storage			-	256 GB		
Printer Languages			SGRaster (Swift Graphic Raster)			
			HP-GL/2			
			HP RTL			
			JPEG			
			CALs G4			
Apple AirPrint			Supported (MacOS / iOS / iPadOS)			
Operation Panel	Display		LCD (4.3 inch/10.9 cm TFT color)			
Interface	USB B Port	Type	Built-in (Hi-Speed USB)			
		Mode	Full Speed (12 mbit/sec), High Speed (480 mbit/sec), Bulk Transfer			
	USB A Port		Series B (4 pins)			
	Gigabit Ethernet	Type	Built-in			
		Standard	IEEE802.3ab (1000base-T) / IEEE802.3u (100BASE-TX) / IEEE802.3 (10BASE-T)			
		Protocol	SNMP (Canon-MIB), HTTP, TCP/IP (IPv4/IPv6), FTP			
	Wireless LAN	Standard	IEEE802.11n/IEEE802.11g/IEEE802.11b			
		Security	WPA-PSK (TKIP/AES) WPA2-PSK (TKIP/AES) WPA3-SAE (AES) WPA-EAP (AES) ⁵ WPA2-EAP (AES) ⁵ WPA3-EAP (AES) ⁵			
PRINT HEAD						
Model			PF-06			
Nozzles Per Chip			15,360 nozzles (MBK 5,120 nozzles, OtherColors 2,560 nozzles each)			
INK TANK						
Colours			Pigment 5 Color (MBK/BK/C/M/Y)			
Capacity	Sales Use		130 ml / 300 ml			
	Starter Use		130 ml (MBK) / 90 ml (BK / C / M / Y)			

MEDIA HANDLING			TM-5510 (24")	TM-5515 (24")
Media Feed & Output	Roll Paper		One roll, upper-loading, front output	
	Cut Sheet		Upper-loading, front output	
Media Thickness	Roll Paper		0.07 ~ 0.8 mm	
	Cut Sheet			
Maximum Outside Diameter of Roll Paper			150 mm or less	
Media Core Size	Roll Core Internal Diameter		2" / 3"	
Media Width	Roll Paper		203.2 ~ 610 mm	
	Cut Sheet			
Min. Printable Paper Length	Roll Paper		203.2 mm	
	Cut Sheet		279.4 mm	
Max. Printable Paper Length	Roll Paper		18 m ⁷	
	Cut Sheet		1.6 m	
Margins (Top, Bottom, Sides)	Recommended Area	Roll Paper	20 mm, 3 mm, 3 mm	
		Cut Sheet	In Case of Apple AirPrint Top: 20 mm, Bottom: 31 mm, Side: 3 mm Top: 20 mm, Bottom: 20 mm, Side: 3 mm	
	Printable Area	Roll Paper	3 mm, 3 mm, 3 mm	
		Roll Paper (Borderless Print)	0 mm, 0 mm, 0 mm	
		Cut Sheet	3 mm, 20 mm, 3 mm With Apple AirPrint: 3 mm, 12.7 mm, 3 mm	
OPTIONAL ACCESSORIES				
Stand Basket (Loading Basket)			SD-26	
Desktop Basket			BU-07	
2/3" Roll Holder			RH2-28	
IC Card Reader Holder			RA-02	
CONSUMABLES				
Ink Tank	Matte Black (MBK)		PFI-8323 (300 ml) / PFI-8123 (130 ml)	
	Magenta (M)		PFI-8321 (300 ml) / PFI-8121 (130 ml)	
	Black (BK) / Cyan (C) / Yellow (Y)		PFI-8320 (300 ml) / PFI-8120 (130 ml)	
Print Head			PF-06	
Cutter Blade			CT-08	
Maintenance Cartridge			MC-31	

Specifications are subject to change without notice.

¹ Includes Roll Holder Set, excludes ink and print head.

² Using wired LAN.

³ Measured based on ISO7779 standards, using 24-inch Standard Plain Paper2 (Standard Plain Paper, Standard mode, Line Drawing/Text mode).

⁴ User adjustments necessary. Printing environment and media must match those used for the adjustments.

⁵ Supports IEEE802.1X (EAP-TLS/EAP-TTLS/PEAP).

⁶ 3" core adaptor is NOT in the box. Available as a service part.

⁷ Varies according to the OS and application.



SOUTH AND SOUTHEAST ASIA REGIONAL HEADQUARTERS
CANON SINGAPORE PTE. LTD.
438A Alexandra Road, #06-10, Alexandra Technopark, Singapore 119967
Tel : 65-6799-8888 | Fax : 65-6799-8882 | https://asia.canon

DEALER'S STAMP	This document is for information purposes only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.
----------------	---