


TX-SERIES

TX-5130 MFP Z36

Combining Fast Speed with Good Quality Scanning

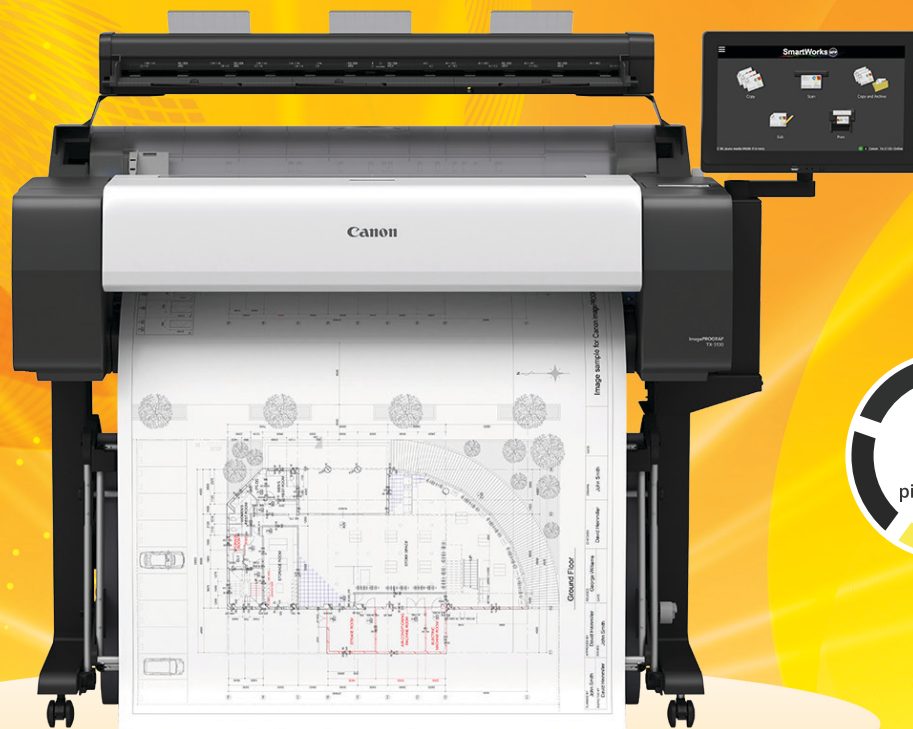

The new imagePROGRAF TX-5130 is the latest model in the TX-Series, delivering outstanding quality, high productivity and operability. A single roll printer being equipped with unique class-leading print technologies and security features, TX series is the ideal solution for all CAD drawings, GIS, perspective rendering and poster printing.

TX-5130 Spec Sheet

ITEM		SPECIFICATION	
Model		TX-5130 MFP Z36	
Class		36"	
Ink Type		Pigment inks/5 color MBK/BK/C/M/Y	
Max. Print Resolution		2400 × 1200dpi	
Dimensions WxDxH (mm), Weight (Kg) (Unit)	Main Unit	1285 x 772 x 439 mm (Operation panel is not tilt up) Weight : 54 kg (including Roll Holder Set, excluding ink and print head)	
	Main Unit + Stand + Basket (SD-35)	1285 x 885 x 1060 mm (Basket Opened) 1285 x 780 x 1060 mm (Basket Closed) Weight: 68 kg (including Roll Holder Set, excluding ink and print head)	
Dimensions WxDxH (mm), Weight (Kg) (Package)	Printer (Main unit with stand and pallet) (SD-35)	1462 x 1122 x 799 mm, Weight: 116 kg	
Power Supply	Input power	AC 100-240V (50-60Hz)	
	Power consumption (using wired LAN)	Approx. 69W	
	At sleep mode (using wired LAN)	Approx. 1.6W	
	At the power off	Approx. 0.06W	
Recommended Environment		Temperature: 15-30 °C, Humidity: 10-80% RH (no dew condensation)	
Acoustic Noise	Acoustic pressure	Operation: Approx. 41 dB Stand by: 35dB(A) or less Measured based on ISO7779 standard by using 36 inch Standard Plain Paper2 * Standard Plain Paper, Standard mode, Line Drawing/Text mode	
	Acoustic power	Operation: Approx. 6.2 Bels Measured based on ISO7779 standard by using 36 inch Standard Plain Paper2 * Standard Plain Paper, Standard mode, Line Drawing/Text mode	
Line Accuracy		±0.1%	
Memory	Standard memory	128GB (Physical memory 2GB)	
Storage		256GB	
Printer Languages		SGRaster (Swift Graphic Raster)	
		HP-GL/2	
		HP RTL	
		JPEG	
		CALs G4	
	IPP- Everywhere	Supported	
Operation Panel Display		LCD (4.3 inch / 10.9 cm TFT color)	
Interface	USB B Port	Type	Built in (Hi-Speed USB)
		Mode	Full Speed (12 Mbit/sec), High Speed (480 Mbit/sec), Bulk transfer
		Connector type	Series B (4 pins)
	USB A Port		USB Memory (Direct Print)
		Type	Built in
	Gigabit Ethernet	Standard	IEEE802.3ab (1000base-T), IEEE802.3u (100BASE-TX) / IEEE802.3 (10BASE-T)
		Protocol	SNMP (Canon-MIB), HTTP, TCP/IP(IPv4/IPv6), FTP
		Standard	IEEE802.11n/ IEEE802.11g/IEEE802.11b
	Wireless LAN	Security	WPA-PSK (TKIP/AES) WPA2-PSK (TKIP/AES) WPA3-SAE (AES) WPA-EAP (AES)* WPA2-EAP (AES)* WPA3-EAP (AES)* * Support IEEE802.1X (EAP-TLS/EAP-TTLS/PEAP)
PRINT HEAD			
Print Head	Model	PF-06	
	Nozzle per chip	15,360 nozzles (MBK 5,120 nozzles, OtherColors 2,560 nozzles each)	
INK TANK			
Ink Tank	Capacity	Sales use: 130ml / 300ml Starter use: 130ml (MBK) / 90ml (BK, C, M, Y)	
MEDIA HANDLING			
Media Feed and Output	Roll paper	One Roll, Upper-loading, Front Output	
	Cut sheet	Upper-loading, Front Output	
Media Thickness	Roll paper	0.07~0.8mm	
	Cut sheet		

PRINT HEAD		
Print Head	Model	PF-06
	Nozzle per chip	15,360 nozzles (MBK 5,120 nozzles, OtherColors 2,560 nozzles each)
INK TANK		
Ink Tank	Capacity	Sales use: 130ml / 300ml Starter use: 130ml (MBK) / 90ml (BK, C, M, Y)
MEDIA HANDLING		
Media Feed and Output	Roll paper	One Roll, Upper-loading, Front Output
	Cut sheet	Upper-loading, Front Output
Media Thickness	Roll paper	0.07~0.8mm
	Cut sheet	

PRINT HEAD			
Maximum Outside Diameter of Roll Paper		150 mm or less	
Media Core Size		Internal diameter of roll core: 2"/3"	
Media Width	Roll paper	203.2~917 mm	
	Cut sheet		
Minimum Printable Paper Length	Roll paper	203.2 mm	
	Cut sheet	279.4 mm	
Maximum Printable Paper Length		Roll paper	18m (Varies according to the OS and application)
		Cut sheet	1.6m
Margins	Recommended area	Roll paper	Top: 20mm, Bottom: 3mm, Side: 3mm
		Cut sheet	In Case of AppleAirPrint Top: 20mm, Bottom: 31 mm, Side: 3mm Top: 20mm, Bottom: 20mm, Side: 3mm
	Printable area	Roll paper	Top: 3mm, Bottom: 3mm, Side: 3mm
		Roll paper (borderless print)	Top: 0mm, Bottom: 0mm, Side: 0mm
		Cut sheet	In Case of AppleAirPrint Top: 3mm, Bottom: 12.7mm, Side: 3mm Top: 3mm, Bottom: 20mm, Side: 3mm

OPTION	
2/3" Roll Holder	RH2-35
IC Card Reader Holder	RA-02
CONSUMABLES	
Ink Tank	TX-5130 Matte Black: PFI-8123 (130 ml) / PFI-8323 (300 ml) Magenta: PFI-8121 (130 ml) / PFI-8321 (300 ml) Black/ Cyan /Yellow: PFI-8120 (130 ml) / PFI-8320 (300 ml)
Print Head	PF-06
Cutter Blade	CT-08
Maintenance Cartridge	MC-31

SCANNER *1		Z36
Scan Width		36" (914 mm)
Min. Scan Width		6" (150 mm)
Max. Scan Length	JPEG / PDF	8 m
	PDF Long Scan	50 m (300dpi)
	TIFF	15.2 m
Max. Copy Speed (inch/sec) *2	24-bit Colour	200 dpi: 6 ips / 152.4 mm per sec 300 dpi: 4 ips / 101.6mm per sec 600 dpi: 2 ips / 50.8 mm per sec
	8-bit Greyscale & Monochrome	200 dpi: 13 ips / 330.2 mm per sec 300 dpi: 8.6 ips / 218.4 mm per sec 600 dpi: 4.3 ips / 109.2 mm per sec
Max. Scan Speed (inch/sec) *2	24-bit Colour	200 dpi: 3 ips / 76.2 mm per sec 300 dpi: 2 ips / 50.8 mm per sec 600 dpi: 2 ips / 50.8 mm per sec
	8-bit Greyscale & Monochrome	200 dpi: 13 ips / 330.2 mm per sec 300 dpi: 8.6 ips / 218.4 mm per sec 600 dpi: 4.3 ips / 109.2 mm per sec
Optical Resolution		1200 dpi
Document Handling *3		Front Load, Rear Output
Max. Document Thickness *4		1 mm
System Controller	Hard Disk	256 GB (Solid State Drive)
	Memory	16 GB
	Display	15.6" Multi-touch Colour Display
	Software Included	SmartWorks MFP V6
Scan Format		PDF / Multipage PDF / Multipage TIFF / JPEG / TIFF / DWF
Scan Functions		Copy, Scan, Print, Edit, Copy & Archive
Scan Destinations		USB, Network, Folder, Email, Cloud
Dimensions (W x D x H) *5		1056 x 251 x 156 mm
Weight	Scanner	7.8 kg
	System Controller	2.5 kg
Power Consumption (Scanner)	Operation *6	22.7 W (Colour) / 23.3 W (Greyscale)
	Sleep Mode	0.2 W
	Standby	12.4W

*1 Scanner is designed by Global Scanning DK A/S. Scanner is supplied with TX-5130 MFP Z36.
*2 The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times and quoted top speeds will depend on the host performance and are not guaranteed for all media types. Scan times quoted are the maximum for true 200 x 200 dpi image capture.
*3 Thicker documents must be flexible and the document return guides removed and may require additional support. Some media should be scanned at reduced speeds. It is not possible to guarantee to be able to scan all media types and sizes.
*4 To return document to the front, use document return guides.
*5 Document return guides and paper tray folded.
*6 Power consumption is measured with scan resolution setting of 200 dpi.



CANON SINGAPORE PTE. LTD.
438A Alexandra Road #06-10, Alexandra Technopark, Singapore 119967
Tel : 65-6799-888 | Fax : 65-6799-8882 | <https://asia.canon>

CANON BUSINESS PARTNER / DEALER'S STAMP	
---	--